(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 29 January 2004 (29.01.2004)

PCT

(10) International Publication Number WO 2004/010207 A1

(51) International Patent Classification7:

G02F 1/133

(21) International Application Number:

PCT/KR2002/001367

(22) International Filing Date:

22 July 2002 (22.07.2002)

(25) Filing Language:

Korean

(26) Publication Language:

English

- (71) Applicant (for all designated States except US): SEVIT CO., LTD [KR/KR]; 126-1 Gongdan-dong, Gumi-si, Gyeongsangbuk-do 730-902 (KR).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): LEE, Weon-Mok [KR/KR]; 101-1507 Oseong APT Bokseop-ri Yangmok-myeon, 718-814 Chilgok-gun Gyengsangbuk-do (KR).
- (74) Agent: HAW, Yong-Noke; 8th Fl. Songchon Bldg., 642-15 Yoksam-dong, Kangnara-ku, 135-080 Seoul (KR).


- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TI, TM, TN, TR, TT, TZ, UA, UG, US, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

[Continued on next page]

(54) Title:-A DISPLAY APPARATUS WHOSE-SIGNAL PROCESSING LINIT IS SEPARATED

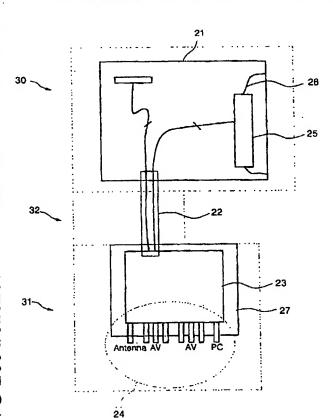

(57) Abstract: The present invention relates to a flap type display apparatus, and particularly to a display apparatus in which an image display unit such as a LCD panel, and a diving circuit, i.e., a signal processing unit for controlling the image display unit, are separated each other. A display apparatus whose signal processing unit is separated according to the present invention is comprised of: an image display unit for displaying an image; a signal processing unit installed separately independent of the image display unit, for converting external signal so that the image display unit operates; and a signal connecting unit for connecting the image display unit and the signal processing unit.

WO 2004/010207 A1 HILLIAN HILL

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.